

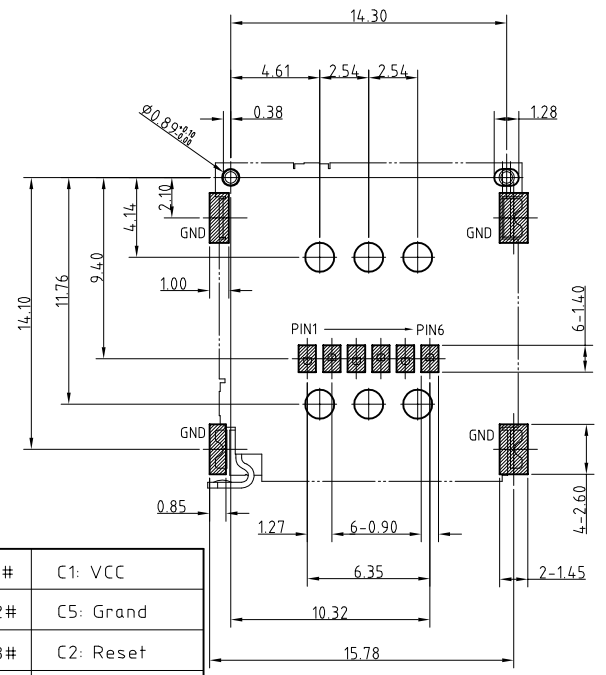
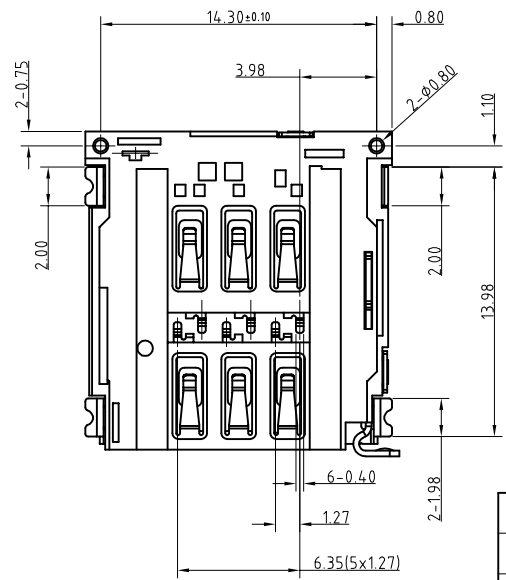


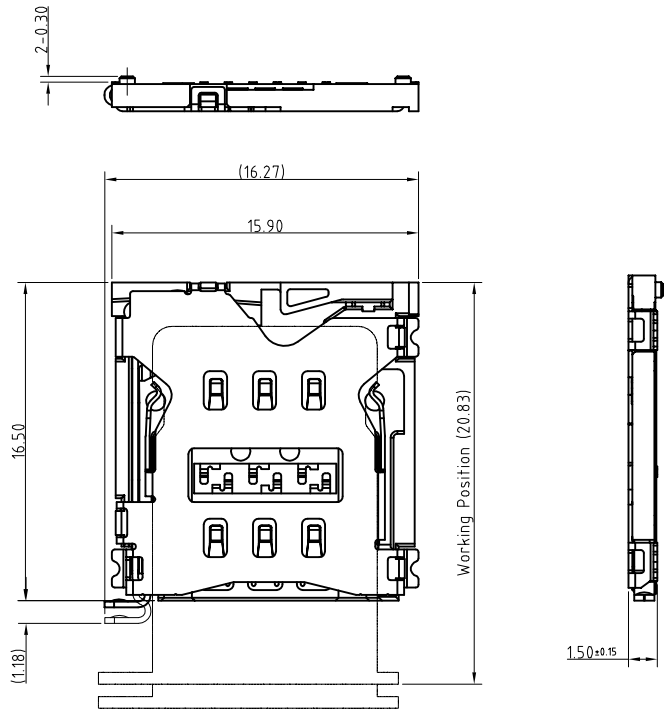


|        |           |
|--------|-----------|
| PIN 1# | C1: VCC   |
| PIN 2# | C5: Grand |
| PIN 3# | C2: Reset |
| PIN 4# | C6: VPP   |
| PIN 5# | C3: Clock |
| PIN 6# | C7: I/O   |

Recommended PCB Layout  
Tolerance: ±0.05

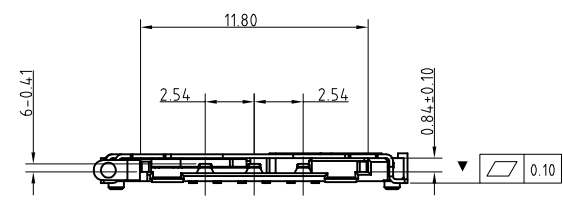

- NOTE:
- Material & Finish See Table;
  - Characteristic:
    - 2-1.Current Rating :1A max.
    - 2-2.Contact Resistance:50mOhms max
    - 2-3.Insulation Resistance:100MOhms min./500VDC
    - 2-4.Dielectric Withstanding Voltage:500VAC/1minute
    - 2-5.Mating Force: 10N Max, Withdrawal Force: 1N Min.;
    - 2-6.Durability: 1500 Cycles
    - 2-7.Operating Temperature:-25°C to+85°C
  - Critical Dimensions Marked "▼" Should Check By QC.
  - Please Contact PROMAX Sales Representative to Verify Product Details.



|      |           |                 |                                                                              |
|------|-----------|-----------------|------------------------------------------------------------------------------|
| 5    | Shell     | Stainless Steel | Nickel Under Plated Overall.                                                 |
| 4    | Lever     | Stainless Steel | /                                                                            |
| 3    | Cam       | Stainless Steel | /                                                                            |
| 2    | Housing   | Thermoplastics  | Black,UL94V-0                                                                |
| 1    | Terminal  | Copper Alloy    | Gold Flash on Solder Tails and Contact Area;<br>Nickel Under Plated Overall. |
| Item | Part Name | Material        | Description                                                                  |

|                             |           |                                                                     |       |                                           |                             |
|-----------------------------|-----------|---------------------------------------------------------------------|-------|-------------------------------------------|-----------------------------|
| CUSTOMER INSPECTION DRAWING |           | 深圳市普玛斯精密组件有限公司<br>SHENZHEN PROMAX EXACTITUDE DISCRETENESS CO.,LTD . |       |                                           |                             |
| APPROVED:                   | Jean Long | GENERAL TOLERANCES                                                  |       | TITLE: 1.5H Nano SIM Card CONN With Lever |                             |
|                             |           | .X:                                                                 | ±0.30 | PART NO: MC06-60150-7F                    |                             |
| CHECKED:                    | Jean Long | .XX:                                                                | ±0.20 |                                           |                             |
|                             |           | .XXX:                                                               | ±0.10 | DWG NO: DMC06-60150                       |                             |
| DRAWING:                    | King Hsu  | ANGEL:                                                              | ±1°   |                                           |                             |
|                             |           | SHEET:                                                              | 1 / 1 | REV: A                                    | UNIT: mm SCALE: / SHEET: A4 |