

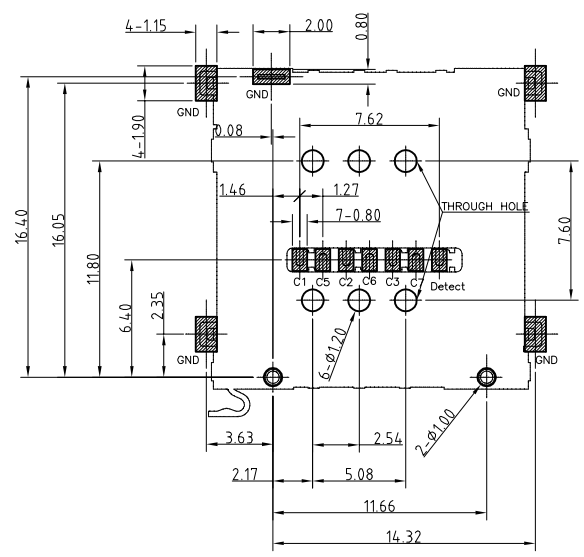
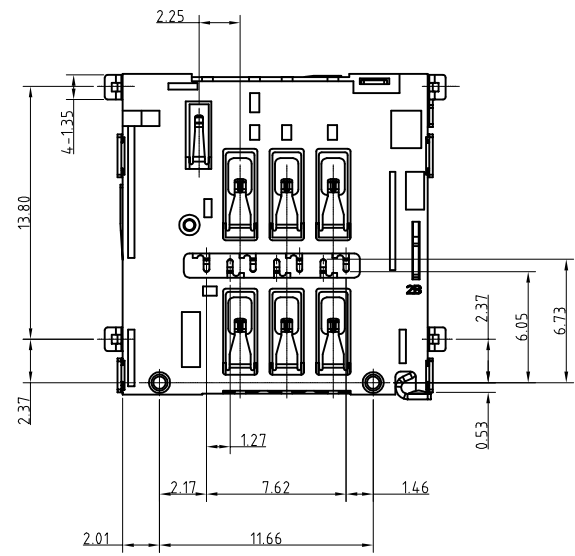



LTR	ECN NO.	DRG
A	RD13-0825001	King

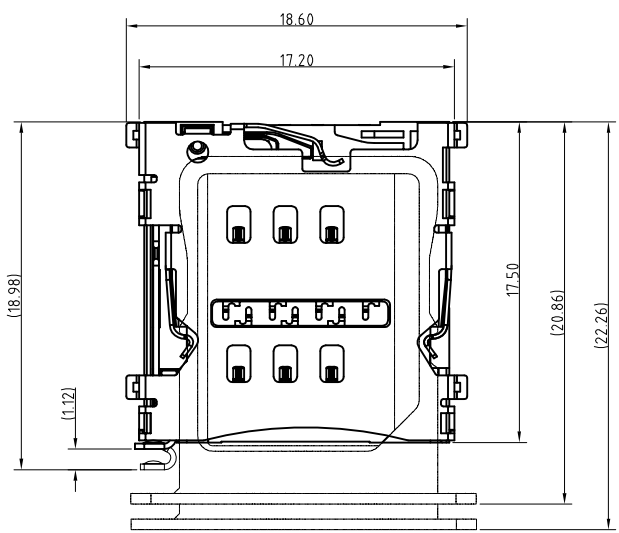


Recommended PCB Layout  
Tolerance: ±0.05

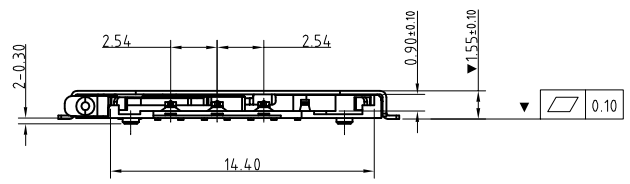

NOTE:  
 ▲ Material & Finish See Table;  
 2. Circuit Diagram For Switch



3. Characteristic:  
 3-1.Current Rating :1A max.  
 3-2.Contact Resistance:50mOhms max  
 3-3.Insulation Resistance:1000MOhms min./500VDC  
 3-4.Dielectric Withstanding Voltage:500VAC/1minute  
 3-5.Mating Force: 10N Max, Withdrawal Force: 1N Min.;  
 3-6.Durability: 1500 Cycles  
 3-7.Operating Temperature:-25°C to+85°C  
 4. Critical Dimensions Marked "▼" Should Check By QC.  
 5. Please Contact PROMAX Sales Representative to Verify Product Details.

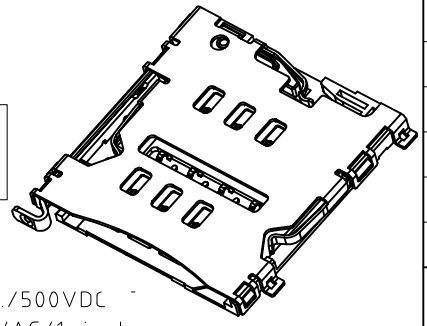

6	Shell	Stainless Steel	Nickel Under Plated Overall.
5	Lever	Stainless Steel	/
4	Cam	Stainless Steel	/
3	Housing	Thermoplastics	Black,UL94V-0
2	Detect	Copper Alloy	Gold Flash on Solder Tails ; Gold Flash on Contact Area;
1	Terminal	Copper Alloy	Nickel Under Plated Overall.
Item	Part Name	Material	Description

CUSTOMER INSPECTION DRAWING		深圳市普玛斯精密组件有限公司 SHENZHEN PROMAX EXACTITUDE DISCRETENESS CO.,LTD.			
APPROVED:	Jean Long	GENERAL TOLERANCES	TITLE:	15H Lever Type Micro SIM Card CONN	
CHECKED:	Jean Long	.X:	±0.30	PART NO:	MC02-61150-7F
		.XX:	±0.20	DWG NO:	DMC02-61150
DRAWING:	King Hsu	.XXX:	±0.10	REV:	A
		ANGEL:	±1°	UNIT:	mm
		SHEET:	1 / 1	SCALE:	/
				SHEET:	A4