

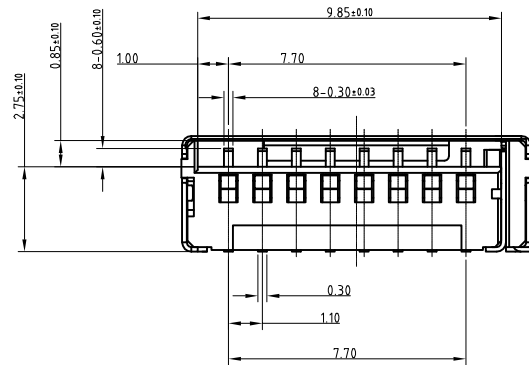
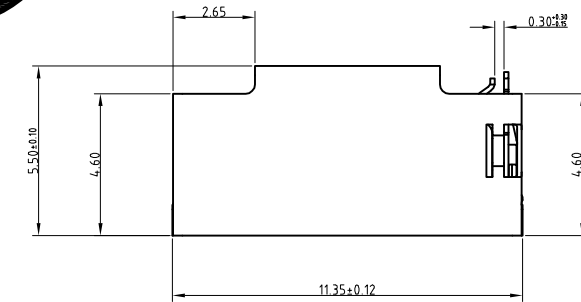


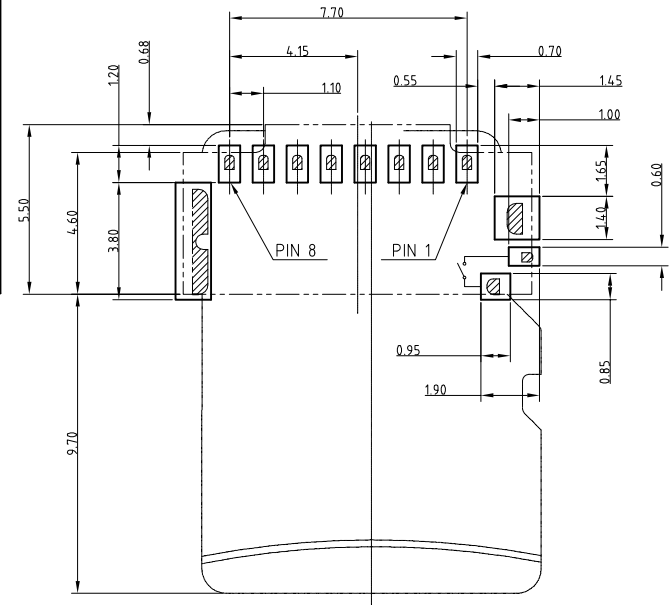

Function Define

Item	Name
PIN 1	DAT2
PIN 2	CD/DAT3
PIN 3	CMD
PIN 4	VDD
PIN 5	CLK
PIN 6	VSS2
PIN 7	DAT0
PIN 8	DAT1



Recommended PCB Layout

Tolerance: ±0.05

NOTE:

1. Material & Finish See Table;

2. Circuit Diagram For Switch

Detect —○— Common Inserted Card

Detect —○— Common Withdrawal Card (Normal)


3. Characteristic:

- 3-1.Current Rating :0.50A max.
- 3-2.Contact Resistance:100mOhms max
- 3-3.Insulation Resistance:100MOhmsΩ min./500VDC
- 3-4.Dielectric Withstanding Voltage:500VAC/1minute
- 3-5.Mating Force: 20N Max, Withdrawal Force: 1N Min.;
- 3-6.Durability: 5000 Cycles

3-7.Operating Temperature:-25°C to+85°C

4. Critical Dimensions Marked "▼" Should Check By QC.

5. Please Contact GOSTAR Sales Representative to Verify Product Details.



5	Shell	Stainless Steel	Nickel Under Plated Overall.Gold Flash on Solder Tails
4	Housing	Thermoplastics	Black,UL94V-0
3	Common	Copper Alloy	Tin Plated on Solder Tails;
2	Detect	Copper Alloy	Gold Flash on Contact Area;
1	Terminal	Copper Alloy	Nickel Under Plated Overall.
			Gold Flash on Solder Tails and Contact Area;
			Nickel Under Plated Overall.
Item	Part Name	Material	Description

CUSTOMER
INSPECTION DRAWING深圳市普玛斯精密组件有限公司
SHENZHEN PROMAX EXACTITUDE DISCRETENESS CO.,LTD .

APPROVED: Jean Long

GENERAL TOLERANCES

TITLE: 3.75H Push-Pull TYPE TF Card CONN

CHECKED: Jean Long

.X: ±0.30

PART NO: MC01-21375-7F

DRAWING: King Hsu

.XX: ±0.20

.XXX: ±0.10

ANGEL: ±1°

SHEET: 1 / 1

DWG NO: DMC01-21375

REV: A

UNIT: mm

SCALE: /

SHEET: A4

