

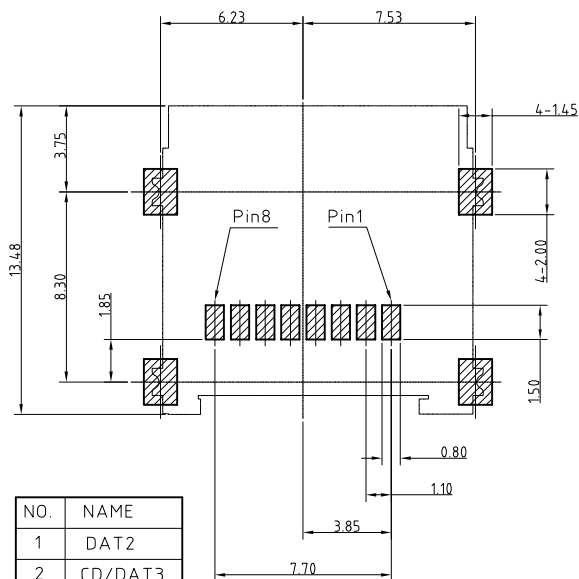



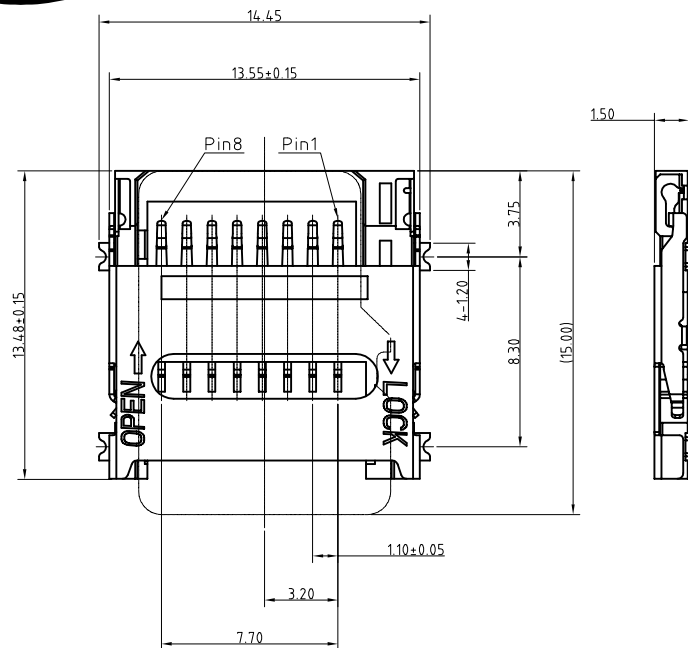


NO.	NAME
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1


Recommended PCB Layout
Tolerance: ± 0.05

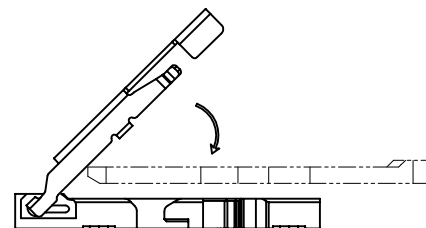

STEP 1
Insert the t-flash card



STEP 2
Cover the Shell



STEP 3
Lock the Shell
Tolerance: ± 0.05

NOTE:


⚠ Material & Finish See Table;

2. Characteristic:

- 2-1.Current Rating :1A max. Voltage Rating:30V;
- 2-2.Contact Resistance:50mOhms max
- 2-3.Insulation Resistance:100MOhms Ω min./500VDC
- 2-4.Dielectric Withstanding Voltage:100VAC/1minute
- 2-5.Durability: 5000 Cycles
- 2-6.Operating Temperature:-25°C to+85°C

3. Critical Dimensions Marked "▼" Should Check By QC.

4. Please Contact GOSTAR Sales Representative to Verify Product Details.



3	Shell	Stainless Steel	Nickel Under Plated Overall.
2	Housing	Thermoplastics	Black,UL94V-0
1	Terminal	Copper Alloy	Gold Flash on Contact Area,Tin Plated on Solder Tails; Nickel Under Plated Overall.
Item	Part Name	Material	Description
CUSTOMER INSPECTION DRAWING		深圳市普玛斯精密组件有限公司 SHENZHEN PROMAX EXACTITUDE DISCRETENESS CO.,LTD .	
APPROVED:	Jean Long	GENERAL TOLERANCES	TITLE: 1.5mm Hinge Type Micro SD Card CONN
		.X:	±0.30
CHECKED:	Jean Long	.XX:	±0.20
		.XXX:	±0.10
DRAWING:	King Hsu	ANGEL:	±1°
		SHEET:	1 / 1
		REV: A	UNIT: mm
		SCALE: /	SHEET: A4
			

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO PROMAX ELECTRONIC CO.,LTD.AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.