
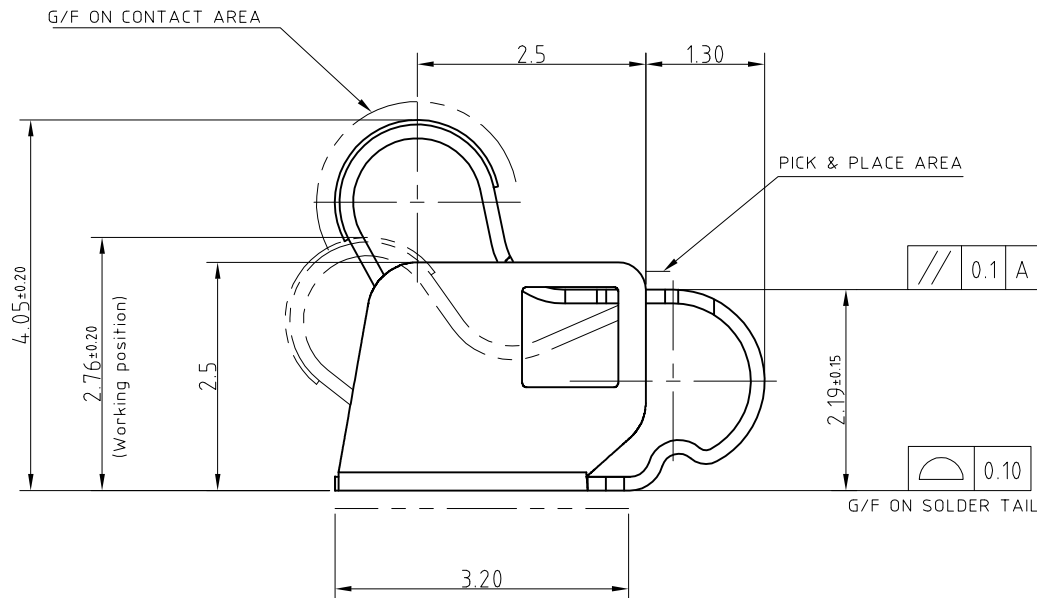
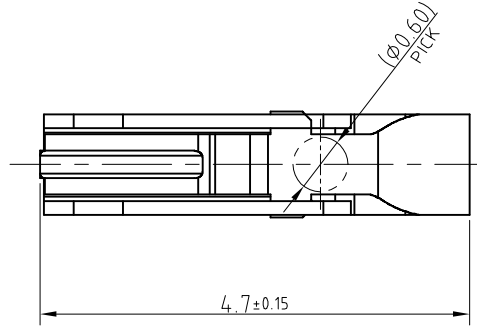


Recommended PCB Layout
Tolerance: ±0.05

NOTES:

1. MATERIAL: C19900, THICKNESS=0.15mm,
FINISH: GOLD FLASH ON CONTACT AND SOLDER AREA;
UNDERPLATED: Nickel 30-80u" PLATED OVERALL;
2. SPECCIFICATIONS:
2-1:CONTACT RESISTANCE:50mOhms MAX.
2-2:OPERATING TEMPERATURE:-20°C - +65°C
2-3:PER-LOAD FORCE:0.45N ON CONTACT POINT
2-4:FORCE MAX. DEFLECTION:0.7N ON CONTACT POINT
2-5:MAX.BE AM DEFLECTION:1.0mm. ON CONTACT POINT
3. DURABILITY:100 CYCLES
4. PACKING SPECIFICATION:REEL&TAPE
5. PLEASE CONTACT PROMAX SALES REPRESENTATIVE TO VERIFY DETAILS.

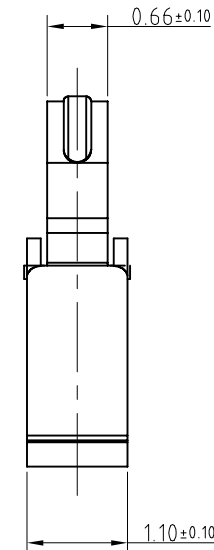

CUSTOMER INSPECTION DRAWING		深圳市普玛斯精密组件有限公司 SHENZHEN PROMAX EXACTITUDE DISCRETENESS CO.,LTD .					
APPROVED:	Jean Long	GENERAL TOLERANCES		TITLE: 4.05H CONTACT SPRING			
		.X:	±0.20	PART NO: SC01-10405-7F			
CHECKED:	Jean Long	.XX:	±0.15	DWG NO: DSC01-10405			
		.XXX:	±0.10				
DRAWING:	King Hsu	ANGEL:	±1°				
		SHEET:	1 / 1	REV: A	UNIT: mm	SCALE: /	SHEET: A4

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO PROMAX ELECTRONIC CO.,LTD.AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.