

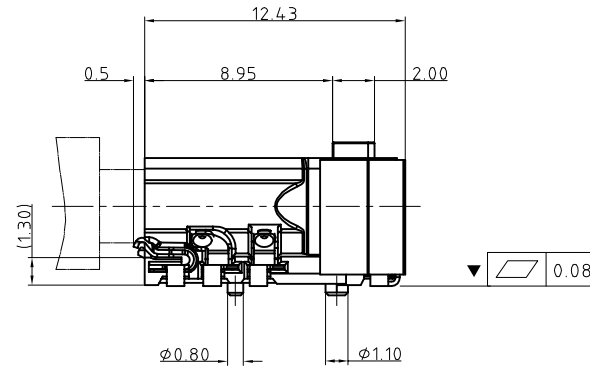


REV.	ECN NO:	APPD
A	RD15-0505001	Jean Long

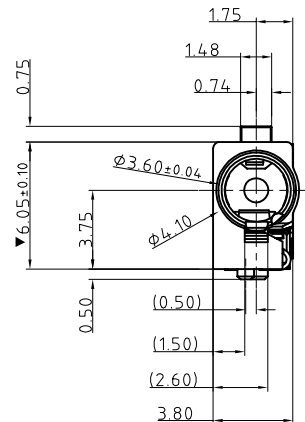

NOTE:

1. Material & Finish See Table;
2. Circuit Diagram For Switch

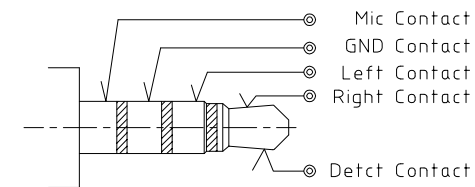



3. Characteristic:

- 3-1.Current Rating: 12V, 1A max.
- 3-2.Contact Resistance: 50mOhms max
- 3-3.Insulation Resistance: 100MOhms min./500VDC
- 3-4.Dielectric Withstanding Voltage: 500VAC/1minute
- 3-5.Mating Force: 30N Max, Withdrawal Force: 3N Min.;
- 3-6.Durability: 5,000 Cycles

3-7.Operating Temperature:-25°C to+85°C


4. Critical Dimensions Marked "▼" Should Check By QC.

5. Please Contact GOSTAR Sales Representative to Verify Product Details.

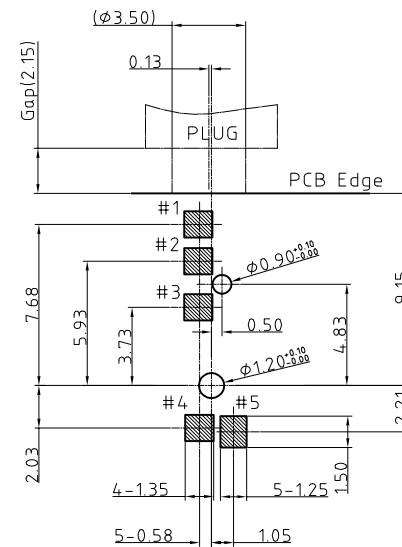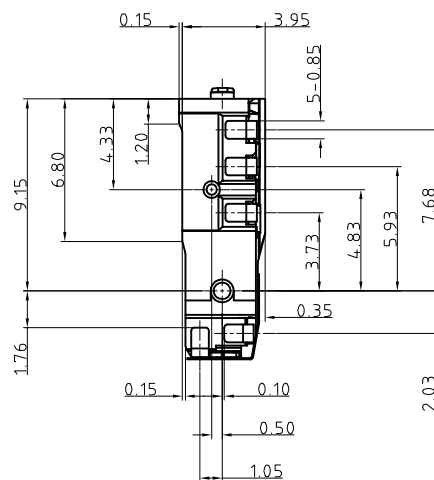


Recommended PCB Layout

Tolerance: ±0.05



φ3.5mm 4POLE PLUG(TOLERANCE: ±0.05)

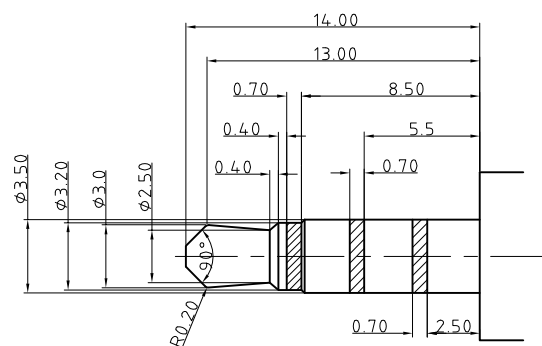

7	Mylar	Polymerizate	Black,
6	Housing	Thermoplastics	Black,UL94V-0
5	Detct Contact	Copper Alloy	Gold Flash on Contact Area; Gold Flash on Solder Tails; Nickel Under Plated Overall.
4	Right Contact	Copper Alloy	
3	Left Contact	Copper Alloy	
2	GND Contact	Copper Alloy	
1	Mic Contact	Copper Alloy	
Item	Part Name	Material	Description

DRAWING TITLE:

Customer Drawing

MATERIAL:

See Table

FINISH:

See Table

UNLESS OTHERWISE

SPECIFIED TOLERANCES

X +/- 0.50 X° +/- 5°

X.X +/- 0.30 X.X° +/- 3°

X.XX +/- 0.20 X.XX° +/- 1°

X.XXX +/- 0.10 UNITS: mm



深圳市高塑达电子有限公司
Shenzhen GOSTAR Electronics CO.,LTD

PART NO:

JA02-41605-7F

APPROVED:

Jean Long

CHECKED:

Jean Long

DESIGN:


King Hsu

PART NAME:

φ3.5 Phone Audio Jack

DWG NO:

DJA02-41605



SCALE

/

SHEET

1/1

REV

A